



MINI CRAWLER CRANE

MC285CG-2

6,210lb.
Maximum Capacity



SLIM 30" (750mm) BODY

5 SECTION BOOM - 28'1" (8.57m)

BOOM TIP SEARCHER HOOK (option)
31'10" (9.7m) MAXIMUM LIFTING HEIGHT

CONFINED AREA 12 POSITION
OUTRIGGER SYSTEM

MOMENT LIMITER DIGITAL LOAD SYSTEM

CRANE/OUTRIGGER INTERLOCK SAFETY SYSTEM

AUXILIARY WINCH w/ LONG ROPE
& HIGH CAPACITY (option)

REMOTE CONTROL
WITH LOAD / CAPACITY DISPLAY

MULTIPLE POWER
OPTIONS GAS / LPG PROPANE

360° SWING



Remote Control



Programmable Moment Limiter



LPG Propane Fuel System (Option)



Searcher Hook (Option)



Auxiliary Winch (Option)



Specifications


Model	MC285CG-2
Maximum Capacities	Main Boom : 4 Part Line - 6,210 lb. (2820kg) 2 Part Line - 3,100 lb. (1405kg) 1 Part Line - 1,560 lb. (708kg) Boom Tip Searcher Hook : 1,870lb. (850kg) Auxiliary Winch : 1,980 lb. (900kg)
Maximum Lifting Height	Hook Block, Ball : 28.54' (8.7m) Boom Tip Searcher Hook : 31.8' (9.7m)
Maximum Radius	Main Boom : 26.9' (8.2m) Boom Tip Searcher Hook : 29.4' (8.9m) Auxiliary Winch : 27.6' (8.4m)
Maximum Reach Below Grade	4 Part Line : - 33' (10.1m) 2 Part Line : - 66' (20.2m) 1 Part Line : - 132' (40.4m) [164' (50m)w/ optional wire rope] Auxiliary Winch 1 Part Line : 328' (100m)
Boom System	Auto Telescopic 8.3' - 28.1' (2.53m - 8.57m) Range 0° - 76°
Travel System	0 - 1.36 mph (0 - 2.2kph) 20° Gradability Track Footprint : 3'2" x 8" (975mm x 200mm) ea. Ground Pressure : 7.15psi, (49.3kpa), average / varies
Engine	Gas : Briggs-Stratton 3564, 14.5hp, EPA Comp. 2.1 gal. tank
Dual Power (Gasoline / LPG)	LPG : 33.5lb Propane Cylinder
Remote Control	Graduated Crane & Outrigger Operation, 4 Micro Speed Settings, Digital Load & Capacity Display
Net Weight	Gas : 4,200 lb. Gas / Propane : 4,325 lb.
Optional Equipment	Boom Tip Searcher Hook, White Rubber Tracks, Single Part Ball / Hook, Man Basket, Rotation Resistant Wire Rope, Oktopus Glass Lifter / Manipulator, Custom Paint Color, Exhaust Scrubber, Transport Trailer, Outrigger Pads

Rated Total Load Chart



MAXIMUM Outriggers, 4 Part Line					
Boom Length	8.3 Ft.	8.4 - 13.3 Ft.	13.4 - 18.2 Ft.	18.3 - 23.2 Ft.	23.3 - 28.1 Ft.
Radius (Ft.)	Load (Lbs.)	Load (Lbs.)	Load (Lbs.)	Load (Lbs.)	Load (Lbs.)
4.5	6210	6210	2630		
5.0	5490	5490	2630		
6.5	4280	4280	2630	1800	
7.0	4020	4020	2630	1800	1210
8.0		3550	2630	1800	1210
10.0		2630	2630	1800	1210
11.5		2130	2130	1800	1210
11.8		2080	2050	1800	1210
12.0		2050	2000	1780	1210
13.0			1750	1650	1210
15.0			1350	1240	860
16.5			1160	1050	750
17.0			1160	1010	710
18.0				950	660
20.0				820	570
21.0				780	520
21.9				730	480
23.0					440
25.0					380
26.9					330

OTHER THAN MAXIMUM Outriggers, 4 Part Line					
Boom Length	8.3 Ft.	8.4 - 13.3 Ft.	13.4 - 18.2 Ft.	18.3 - 23.2 Ft.	23.3 - 28.1 Ft.
Radius (Ft.)	Load (Lbs.)	Load (Lbs.)	Load (Lbs.)	Load (Lbs.)	Load (Lbs.)
4.5	3790	3790	1100		
5.0	3720	3720	1100		
6.5	2410	2410	1100	880	
7.0	2100	2100	1100	880	720
8.0		1500	1100	880	720
10.0		1110	1100	880	720
11.5		850	900	880	720
11.8		810	870	880	720
12.0		790	850	860	720
13.0			750	750	720
15.0			590	600	600
16.5			440	500	500
17.0			440	450	450
18.0				400	400
20.0				340	340
21.0				300	300
21.9				260	260
23.0					220
25.0					170
26.9					130

MAX. Reach Below Grade



Working Range Chart (4Part)

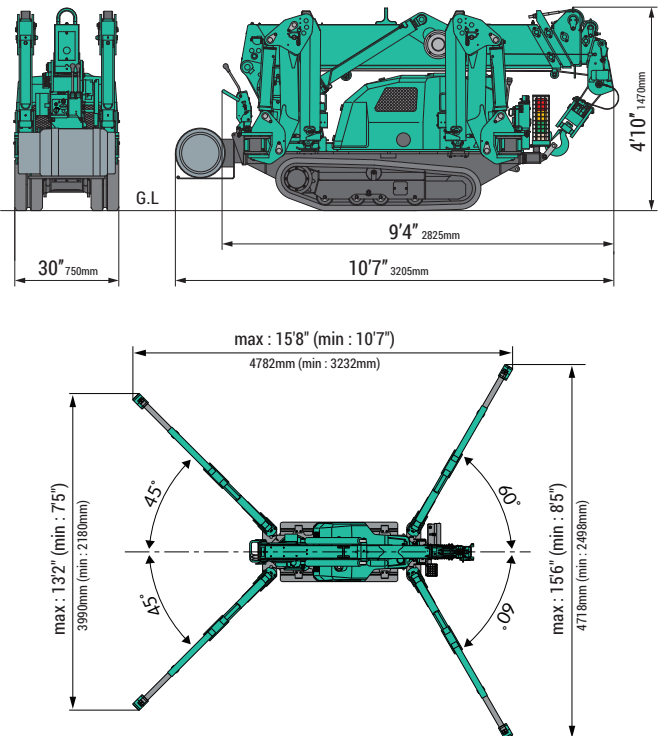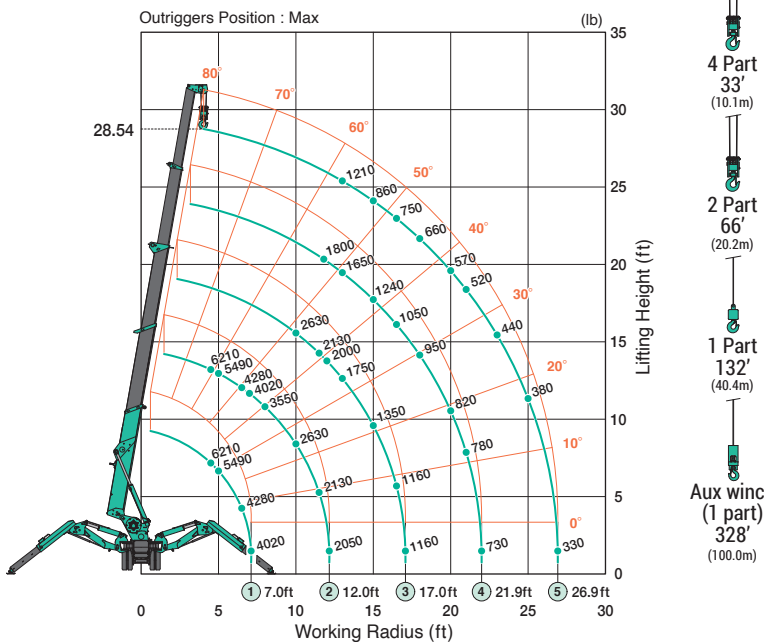

The Rated Total Load Chart is supplied for reference only. Operator and all personnel must refer to the actual crane Rated Total Load Chart to determine allowable machine lifting and operating procedures. We are constantly improving our products and reserve the right to change design and specifications at any time.

ASME B 30.5 2018. ISO 9001 compliant