



Control your work flow, schedule, and budget with the fastest, most consistent material delivery on the market with Beta Max™ high speed hoists

faster. safer. smarter.

LEO/LEO XXL

LEO: 220'/110' LEO XXL: 400'/200'

Capacity: 1000/2000lb

KEY FEATURES

- Ideal for heavy-duty, high lift projects
- Long lasting performance with minimum maintenance required
- Confined and hard to reach spaces made easy with a portable hoist
- Safe and efficient alternative to rope & pulley systems, cranes, and forklifts
- Installs easily on existing scaffold systems, work platforms, I-Beams, and rooftop mounting options
- Easy Cable Replacement (Beta Max™ provides clamps and crimp)
- Optional Scaff-Trac Mounting System provides a standardized and complete lifting solution engineered for easy installation every time



SAFETY FEATURES

- Water Tight Connectors
- Failsafe brake holds the load securely when not lifting or lowering- loads are powered up and down, no free-falling or slipping
- Non-rotating cable helps keeps loads from spinning
- Upper-limit Switch Assembly stops the hoist instantly when activated
- Sturdy Electrical Controller equipped with thermal overload sensing device

INDUSTRIES SERVED

- Scaffolding • Masonry • Stucco
- Glazing • Demolition • Restoration • Construction



Contact Beta Max today for local dealer information, to discuss your project, or get a quote.

www.BetamaxHoist.com



(800) 644-6478

* All Beta Max Hoist Systems meet or exceed ANSI & OSHA specifications. This information is intended to be informative only, and does not constitute a representation or warranty with regard to Beta Max Hoists or any products or services provided. Prices and information are subject to change. Some or all of the renderings in these materials may vary from the actual hoists.

SPECIFICATIONS

Set Up	Single Line	Double Line
Lift Capacity	1,000 lbs	2,000 lbs
Lift Speed	80 fpm	40 fpm
LEO Lift Height	220'	110'
LEO XXL Lift Height	400'	200'
A/C Power	Leo 220v, 1ϕ or Leo XXL 220v, 3ϕ *cannot be field converted	
Horsepower	1 Phase: 2HP or 3 Phase: 3.3 HP	
Mounting Options	Fixed I-Beam, I-Beam Trolley, Scaff-Trac and Trestle Monorail	

MOUNTING OPTIONS

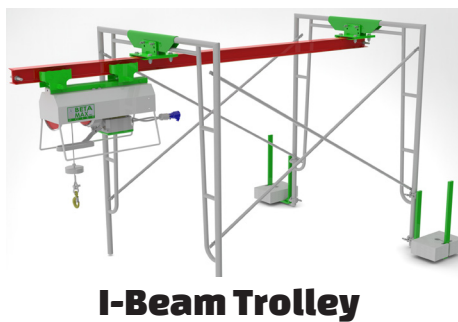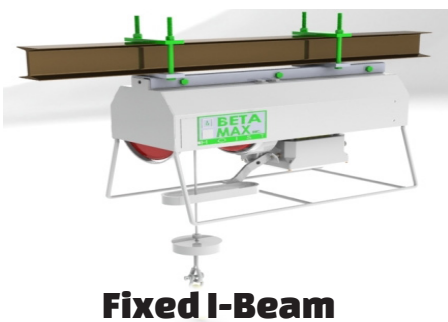

ACCESSORIES

- Brick Fork • Block Fork • Scaffold Frame Fork • Equipment Basket
- Dumpster Bucket • Spreader Bar • Mud Tub • Double Rope Kit
- Counterweight Clamp Assembly • Remote Control Extension
- Power Cord Extension • Wireless Dual Control Package • Booster Transformer

**Contact Beta Max today for local dealer information,
to discuss your project, or get a quote.**

www.BetamaxHoist.com

(800) 644-6478